Acoustics » Acoustic Panels



Brand: Zintra



Acoustics » Acoustic Panels











ECRU/TAUPE

FROST/WHITE

GRASS/LIME


PEBBLE

PEWTER/GREY



SLATE / ASH

Acoustics » Acoustic Panels

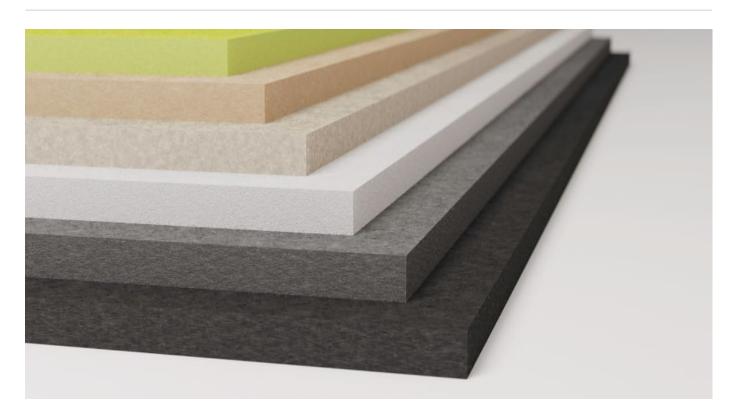

Zintra Acoustic Panel is the perfect solution for your application where acoustic performance and aesthetics are required. Available in 6 colours.

- Absorbs Noise
- Extended Warranty
- Easy Install

- Bleach Cleanable
- Solution Dyed Yarns
- Environmentally Friendly
- Easy Fabrication

Description

Zintra's wide range of colours and ease of use make it the ideal material for commercial, hospitality and institutional projects. Zintra Acoustic Panel features include:

- * Cost effective sound solution NRC = 0.45 for 12mm, 0.75 for 24mm
- * 2800mm long sheets ideal for join-free floor to ceiling applications
- * Broad range of neutral and bright colours
- * Suitable for a multitude of applications walls, ceilings, screens
- * Easily fabricated and installed
- * Pinnable

Find out more about the Benefits of Zintra and its NRC rating on the DOWNLOAD tab.

Dimensions

2800mm x 1225mm x 24mm



Acoustics » Acoustic Panels

Composition	Zintra Acoustic Panel - 100% Solution Dyed (Colour Through) Polyester. 2.3 kg/m²				
Finishes	Matt				
Environmental Info	Easily recycled through standard recycling channels				
Fire Rating	Tested in accordance with AS ISO 9705 2003 for the purpose of determining the Group Number classification required by the Building Code of Australia for the control of fire spread on interior wall and ceiling linings. Classification - Group 1 Specific Extinction - Less than 250m²/kg				
Warranty	5-year warranty. Visit <u>baresque.com.au/warranty</u> for complete details.				
Lead Time	 Held in stock in Australia. From receipt of full payment: Sydney, Melbourne, Brisbane: 3 working days Adelaide: 4 working days Perth: 5-working days 				
Suggested Installation	Be sure to support the panel during installation to avoid bowing or creasing. Adhere to substrate using contact adhesive, Liquid Nails or Z clips. Panel can also be mechanically fixed using details similar to glass fittings. Download the Handling and Installation guide for full instructions.				
Fabrication Techniques	Stanley knife and straight edge				
How to Specify	Colour				

4 of 5



Acoustics » Acoustic Panels

Care	Instructions	Vacuum	to	remove	dust.

Dab Zintra with a damp clean cloth and mild solution of liquid detergent and warm water. Repeat using only clean water, then pat dry with a lint free cloth.

For difficult stains, use a solution of household bleach (10% bleach / 90% water). To remove the bleach, repeat using a clean, water dampened cloth, then pat dry.

Always test in an inconspicuous area first and if you don't see the expected results, contact us.

Customisable

The Zintra Acoustic Solutions range is customisable to your project. Please get in touch with your local contact for details.

Additional Comments

NRC - 0.75 - 0.9 Indoor only. Not suitable as a free standing product.