
**Acoustics** » Acoustic Panels



Brand: Zintra

Applications: Walls

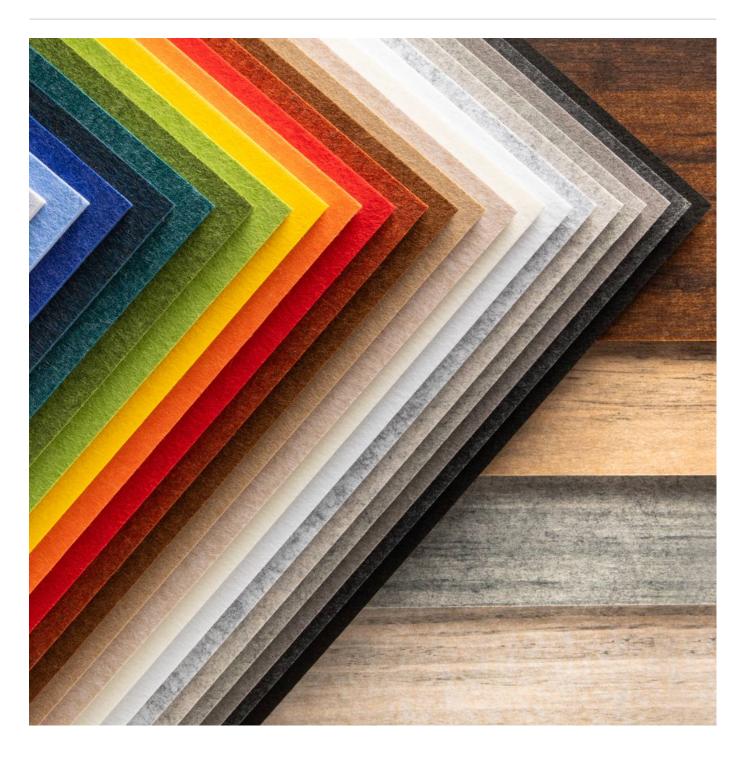

**Acoustics** » Acoustic Panels

Zintra Acoustic Panel is the perfect solution for your application where acoustic performance and aesthetics are required. Available in 30 colours.

<ul><li>✓ Absorbs Noise</li><li>✓ Extended Warranty</li><li>✓ Easy Install</li></ul>	<ul><li>✓ Bleach Cleanable</li><li>✓ Solution Dyed Yarns</li></ul>	<ul><li>Environmentally Friendly</li><li>Easy Fabrication</li></ul>
Description	Baresque's Zintra Acoustic Panel is the perfect solution for your application where acoustic performance as well as aesthetics are required.	
	Zintra's wide range of colours and ease of use make it the ideal material for commercial, hospitality and institutional projects.  Zintra Acoustic Panel features include:	
	NRC = 0.45 for 12mm	
	2800mm long sheets ideal for join-free floor to ceiling applications	
	Broad range of neutral and bright colours	
	Suitable for a multitude of applications - walls, ceilings, screens	
	Easily fabricated and installed	
	Pinnable Find out more about the Benefits of Zintra on the DOWNLOAD tab.	
	Composition	Zintra Acoustic Panel - 100% Solution Dyed (Colour Through) Polyester. 2.4 kg/m²
Environmental Info	Easily recycled through standard recycling channels	
Finishes	Matt	
Dimensions	2800mm x 1225mm x 12mm	
Fire Rating	Tested in accordance with AS ISO 9705 2003 for the purpose of determining the Group Number classification required by the Building Code of Australia for the control of fire spread on interior wall and ceiling linings.	
	Classification - Group 1 Specific Extinction - Less than 250m²/kg	



**Acoustics** » Acoustic Panels

Lead Time	<ul> <li>Held in stock in Australia. From receipt of full payment:</li> <li>Sydney, Melbourne, Brisbane: 3 working days</li> <li>Adelaide: 4 working days</li> <li>Perth: 5-working days</li> </ul>	
Fabrication Techniques	Stanley knife and straight edge	
Suggested Installation	Be sure to support the panel during installation to avoid bowing or creasing.  Adhere to substrate using contact adhesive, Liquid Nails or Z clips.  Panel can also be mechanically fixed using details similar to glass fittings.  Download the Handling and Installation guide for full instructions.	
Care Instructions	Vacuum to remove dust.  Dab Zintra with a damp clean cloth and mild solution of liquid detergent and warm water. Repeat using only clean water, then pat dry with a lint free cloth.  For difficult stains, use a solution of household bleach (10% bleach / 90% water). To remove the bleach, repeat using a clean, water dampened cloth, then pat dry.  Always test in an inconspicuous area first and if you don't see the expected results, contact us.	
Warranty	5-year warranty. Visit <b>baresque.com.au/warranty</b> for complete details.	
Customisable	The Zintra Acoustic Solutions range is customisable to your project. Please get in touch with your local contact for details.	
Additional Comments	NRC - 0.45 - 0.9 Indoor only. Not suitable as a free standing product.	
How to Specify	Colour	



**Acoustics** » Acoustic Panels

#### Colour & Finish Options







**Acoustics** » Acoustic Panels











SKY/BLUE

SLATE/ASH

SMOKE/SILVER

SUNSHINE/YELLOW

TAR/BLACK



TWILIGHT