
Acoustics » Acoustic Panels



Brand: Zintra




Acoustics » Acoustic Panels

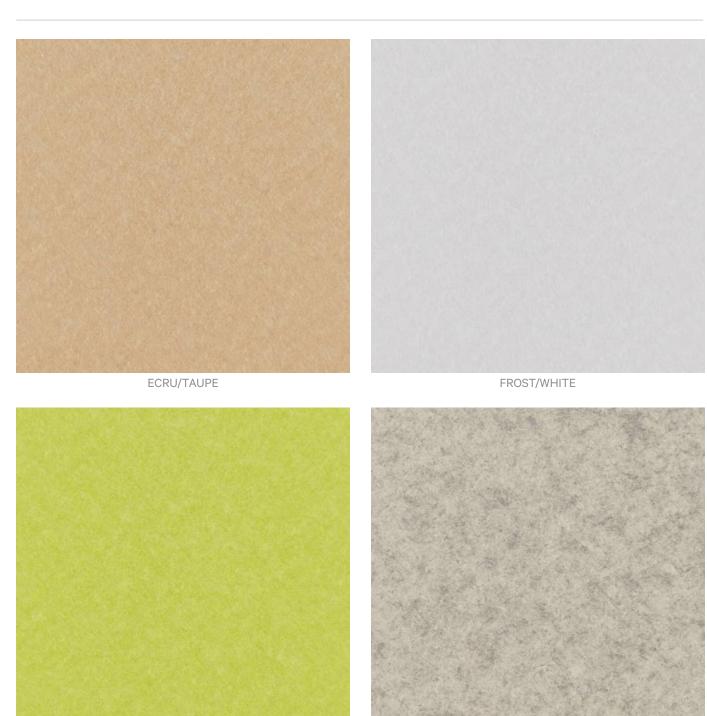


PEBBLE

GRASS/LIME

Acoustics » Acoustic Panels

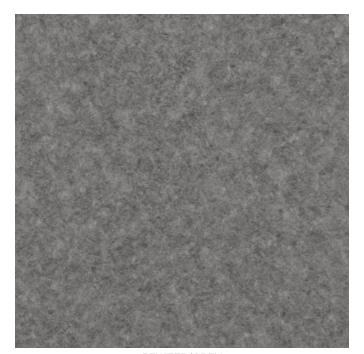



PEWTER/GREY SLATE / ASH

Acoustics » Acoustic Panels

Zintra Acoustic Panel is the perfect solution for your application where acoustic performance and aesthetics are required. Available in 6 colours.

✓ Absorbs Noise✓ Extended Warranty✓ Easy Install	✓ Bleach Cleanable✓ Solution Dyed Yarns	Environmentally FriendlyEasy Fabrication
Description	Zintra's wide range of colours and ease of use make it the ideal material for commercial, hospitality and institutional projects. Zintra Acoustic Panel features include:	
	* Cost effective sound solution - NRC =	0.45 for 12mm, 0.75 for 24mm
	* 2800mm long sheets ideal for join-free	floor to ceiling applications
	* Broad range of neutral and bright color	urs
	* Suitable for a multitude of applications - walls, ceilings, screens	
	* Easily fabricated and installed	
	* Pinnable	
	Find out more about the Benefits of Zint tab.	ra and its NRC rating on the DOWNLOAD
Dimensions	2800mm x 1225mm x 24mm	
Composition	Zintra Acoustic Panel - 100% Solution D	yed (Colour Through) Polyester. 2.3 kg/m²
Finishes	Matt	
Environmental Info	Easily recycled through standard recycli	ing channels
Fire Rating	Tested in accordance with AS ISO 9705 Group Number classification required by control of fire spread on interior wall and Classification - Group 1 Specific Extinction - Less than 250m²/kg	d ceiling linings.
Warranty	5-year warranty. Visit baresque.com.au	/warranty for complete details.



Acoustics » Acoustic Panels

Lead Time	• Held in stock in Australia. From receipt of full payment:	
	Sydney, Melbourne, Brisbane: 3 working days	
	Adelaide: 4 working days	
	Perth: 5-working days	
Suggested Installation	Be sure to support the panel during installation to avoid bowing or creasing.	
	Adhere to substrate using contact adhesive, Liquid Nails or Z clips.	
	Panel can also be mechanically fixed using details similar to glass fittings.	
	Download the Handling and Installation guide for full instructions.	
Fabrication Techniques	Stanley knife and straight edge	
How to Specify	Colour	
How to Specify Care Instructions	Colour Vacuum to remove dust.	
. ,		
. ,	Vacuum to remove dust. Dab Zintra with a damp clean cloth and mild solution of liquid detergent and warm	
. ,	Vacuum to remove dust. Dab Zintra with a damp clean cloth and mild solution of liquid detergent and warm water. Repeat using only clean water, then pat dry with a lint free cloth. For difficult stains, use a solution of household bleach (10% bleach / 90% water). To remove the bleach, repeat using a clean, water dampened cloth, then pat dry.	
. ,	Vacuum to remove dust. Dab Zintra with a damp clean cloth and mild solution of liquid detergent and warm water. Repeat using only clean water, then pat dry with a lint free cloth. For difficult stains, use a solution of household bleach (10% bleach / 90% water). To remove the bleach, repeat using a clean, water dampened cloth, then pat dry. Always test in an inconspicuous area first and if you don't see the expected results,	



Acoustics » Acoustic Panels

Colour & Finish Options

