


GRIDDLE

Zintra Acoustic Pressed Tiles - Zintra Acoustic Pressed Tiles

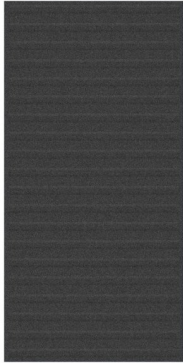

Texture:
 Lustre:
 Transparency:

DESCRIPTION / FEATURES	<p>With a range of standard pressed designs you can give your suspended ceiling texture and definition, whilst retaining the acoustic benefits of a tile inlay system. Baresque™s Zintra Acoustic Pressed Tile is the perfect solution for your application where acoustic performance as well as aesthetics are required.</p> <p>Zintra™s wide range of colours and ease of use make it the ideal material for commercial, hospitality and institutional projects.</p>
HOW TO SPECIFY	<ol style="list-style-type: none"> 1. Size 2. Zintra Colour 3. Pressed Pattern
COMPOSITION	Polyester
FINISHES AVAILABLE	Zintra Acoustic. Available in the Zintra Acoustic 24mm colour range.
STANDARD SIZE	595mm x 595mm or 595mm x 1190mm

THICKNESS	<p>24mm Zintra Acoustic Panel pressed down to approx. 16mm at the thickest point (pattern dependent)</p> <p>A tolerance of +/- 2mm on the pressed section is within acceptable quality level. See notes on wall installation if applicable.</p>
INDOOR/OUTDOOR	Indoor only
WET AREAS	No
SUGGESTED INSTALLATION	<p>Baresque's Zintra Acoustic Pressed Tiles are designed to fit into new or existing suspended ceiling grid systems or direct stuck onto the wall.</p> <p>If used as wall cladding, the tolerance of +/- 2mm on the pressed section should be taken into account. It is recommended to leave an express gap between panels to avoid noticing any variation in thickness.</p> <p>Check out the Baresque Zintra Panel Handling Fabrication Installation Guide on the DOWNLOADS tab for more details.</p>
LEAD TIME	<p>2 weeks subject to panel availability, order size and capacity at time of order.</p> <p>Plus 1 week for Western Australia.</p>
CUSTOMISABLE	<p>Size - Yes. Tool making fees apply</p> <p>Zintra Colour - Yes. 200 sheet minimum</p>
FIRE	<p>Fire:</p> <p>In accordance with AS/NZS 3837, Zintra Acoustic Panel achieved a result of</p> <p>Classification - Group 1</p> <p>Specific Extinction - Less than 250m²/kg</p>

CARE INSTRUCTIONS	Zintra
ENVIRONMENTAL INFORMATION	Zintra
CARE INSTRUCTIONS	<p>Remove spills immediately using damp, clean cloth. Carpet and fabric cleaners can be used.</p> <p>Always test in an inconspicuous area first. If care instructions don't deliver the expected results, cease cleaning method immediately and contact Baresque for assistance.</p>
ENVIRONMENTAL INFORMATION	Easily recycled through standard recycling channels