


## SHALLOT

FlexTex

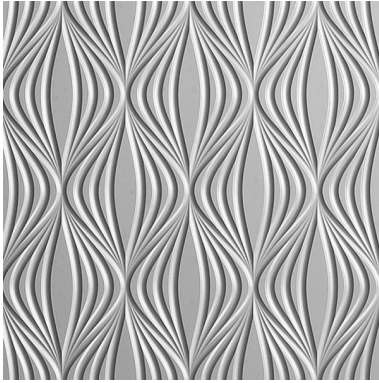

Texture: 2

Lustre: 1

Transparency: 1

<p><b>DESCRIPTION / FEATURES</b></p>	<p>Flextex is a cost effective impact and chemical resistant cladding material making it ideal for wall protection in high traffic areas.</p> <p>Flextex is:</p> <ul style="list-style-type: none"> <li>* Group 1 fire rated</li> <li>* bleach cleanable</li> <li>* able to be cut with a Stanley knife or standard wood working tools</li> <li>* available in flat sheet or textured patterns</li> <li>* available in 40+ standard colours and 25+ standard designs to mix and match for 1000+ combinations</li> <li>* manufactured in an ISO9001/14001 facility which maintains high product standards</li> </ul>
--------------------------------------	---

<b>HOW TO SPECIFY</b>	<p>1. Design name</p> <p>2. Colour</p> <p>Only available in Sheet Size 2440mm x 1220mm x 1mm</p> <p>Design runs vertically only</p>
<b>COMPOSITION</b>	3 dimensional 1mm thermoplastic
<b>FINISHES AVAILABLE</b>	As per finish. Download the FlexTex Colour Range pdf for details
<b>SHEET SIZE</b>	2440mm x 1220mm
<b>WEIGHT</b>	2kg/m <sup>2</sup>
<b>INDOOR/OUTDOOR</b>	Indoor only
<b>WET AREAS</b>	Yes
<b>PATTERN REPEAT</b>	20cm approx
<b>SUGGESTED INSTALLATION</b>	Adhered to substrate using either a neutral cure silicone or non-solvent based contact adhesive. <b>DO NOT USE SOLVENT BASED CONTACT ADHESIVES.</b> See Baresque FlexTex Handling, Fabrication and Installation Guide for more details.
<b>LEAD TIME</b>	5 weeks (approx) from Wednesday + 1 week for Western Australia. Express delivery is available subject to a surcharge. Contact Baresque for details and pricing.
<b>CUSTOMISABLE</b>	Colour - 80 sheet minimum. Design - subject to set up fees. Contact your nearest Baresque office for details.
<b>THERMOFORMABLE</b>	Yes. Cold formable to tight radii
<b>FIRE</b>	<p>Fire:</p> <p>In accordance with AS/NZS 3837</p> <p>Classification - Group 1. Due to the high Specific Extinction result, <b>SPRINKLERS MUST BE USED</b> when using this product as a wall or ceiling lining</p> <p>Specific Extinction - Greater than 250m<sup>2</sup>/kg</p>

<b>ADDITIONAL COMMENTS</b>	Some panelling effect is an inherent characteristic of FlexTex products. This design comes with BIO (Built In Overlap) join which delivers a less noticeable seam. Do not expose FlexTex to heat greater than 60 degrees C.
<b>FABRICATION</b>	Standard wood-working tools. See Baresque FlexTex Handling, Fabrication and Installation Guide for more details.
<b>REFINISHABLE</b>	No
<b>CARE INSTRUCTIONS</b>	FlexTex
<b>ENVIRONMENTAL INFORMATION</b>	FlexTex

## CARE INSTRUCTIONS

Always use a clean, white, soft cloth.

Use the cloth with any of the following in preferred order of use:

\* Clear warm water

\* Mild solution of liquid detergent and warm water

\* Isopropyl Alcohol (a.k.a. rubbing alcohol)

\* Bleach solution (1 bleach : 4 water) - EXCLUDING Wood Grains, Mirrors and Brushed Copper

Do not use abrasive cleaning agents, lacquer thinners or nail polish remover as these may cause discolouration over a period of time.

Remove any cleaner with a clean, damp cloth. Gently pat dry.

A short stiff bristled brush can be used to remove dirt or grease from texture valleys.

Always test in an inconspicuous area first. If care instructions don't deliver the expected results, cease cleaning method immediately and contact Baresque for assistance.

**ENVIRONMENTAL INFORMATION**

FlexTex is manufactured in an ISO 9001:2008 certified plant where there is a commitment to:

- \* maintaining a healthy work environment for its employees and to protecting the community in which it operates
- \* conducting operations in compliance with all applicable environmental laws and regulations as well as other requirements
- \* Continual review and improvement of established targets and objectives through a life-cycle approach to manufacturing and quality product design
- \* Prevent pollution and minimize waste