


## CORBE

### Zintra Acoustic Textures - Zintra Acoustic Textures

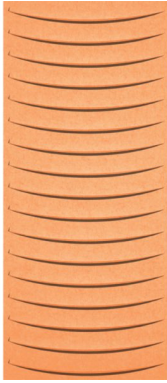

Texture: 1

Lustre: 1

Transparency: 1

<p><b>DESCRIPTION / FEATURES</b></p>	<p>Zintra Acoustic Textures not only highlight the fantastic acoustic qualities of Baresque's Zintra Acoustic Panel, but also the incredible fabrication capabilities Baresque has to offer. Zintra Acoustic Textures subtle 3-dimensional relief creates dimension and acoustic attenuation within your space making them ideal for noisy, public spaces. Zintra's wide range of designs and colours slip easily into classic or modern settings. Zintra Acoustic Textures Panel features include:</p> <ul style="list-style-type: none"> <li>* Cost effective sound solution - NRC = 0.35 for 12mm, 0.6 for 24mm</li> <li>* 2800mm long sheets ideal for join-free floor to ceiling applications</li> <li>* Broad range of neutral and bright colours</li> <li>* Suitable for a multitude of applications - walls, ceilings, screens</li> <li>* Easily fabricated and installed</li> <li>* Pinnable</li> </ul>
--------------------------------------	--

<b>HOW TO SPECIFY</b>	<p>1. Design</p> <p>2. Colour</p> <p>Only available in Sheet Size/Thickness 2790mm x 1195mm x 12mm (becomes approx. 24mm thick overall when textures are pushed out)</p>
<b>COMPOSITION</b>	Polyester
<b>FINISHES AVAILABLE</b>	Matt. Go to the downloads tab to view the Zintra Acoustic Panel colour range
<b>SHEET SIZE</b>	2795mm x 1195mm
<b>WEIGHT</b>	2.3kg/m <sup>2</sup>
<b>INDOOR/OUTDOOR</b>	Indoor only
<b>WET AREAS</b>	No
<b>PATTERN REPEAT</b>	N/A
<b>SUGGESTED INSTALLATION</b>	Zintra Acoustic Textures should be installed using 3M VHB double sided tape (not supplied) as per the Handling Fabrication and Installation guide on the Downloads tab.
<b>LEAD TIME</b>	2 week production time plus delivery. Sydney, Melbourne, Brisbane - 3 working days, Adelaide - 4 working days, Perth - 5 working days.
<b>CUSTOMISABLE</b>	<p>Design - 10 sheet minimum</p> <p>Colour - 200 sheet minimum</p>
<b>THERMOFORMABLE</b>	No
<b>FIRE</b>	<p>Fire:</p> <p>In accordance with AS/NZS 3837, Zintra Acoustic Panel achieved a result of</p> <p>Classification - Group 1</p> <p>Specific Extinction - Less than 250m<sup>2</sup>/kg</p>

<b>FABRICATION</b>	Standard woodworking tools or Stanley knife
<b>REFINISHABLE</b>	No
<b>CARE INSTRUCTIONS</b>	Zintra
<b>ENVIRONMENTAL INFORMATION</b>	Zintra
<b>CARE INSTRUCTIONS</b>	<p>Remove spills immediately using damp, clean cloth. Carpet and fabric cleaners can be used.</p> <p>Always test in an inconspicuous area first. If care instructions don't deliver the expected results, cease cleaning method immediately and contact Baresque for assistance.</p>
<b>ENVIRONMENTAL INFORMATION</b>	Easily recycled through standard recycling channels