**Acoustics** » Acoustic Panels



Collection: Pattern Panel

**Acoustics** » Acoustic Panels



Pattern Panel Bushan Detail

**Acoustics** » Acoustic Panels

Discover the 51 classic and contemporary designs available in Zintra Pattern Panels. Effortlessly elevate your space with style, texture, and superior sound absorption with Pattern Panel Bhushan.

✓ Acoustic✓ Bleach Cleanable✓ Easy Clean✓ Easy Install

#### Description

Zintra Patterns offers a broad range of classic or contemporary panel designs that can be used on their own, or in conjunction with Zintra backing, to create beautiful, acoustic screens and wall coverings.

With virtually unlimited design options, each pattern can be intricately cut of out Zintra and paired with a matching or contrasting solid Zintra backing panel to achieve a unique aesthetic for walls or ceilings. Experience enhanced noise absorption and easy installation, while enjoying a broad range of neutral and vibrant Colours to suit any space.

Bhushan, offers a mix of triangles pattern

#### **Choose from 51 designs.**

Abhaya | Asiatic | Astra | Bengal | Bharata | Bhushan | Circuit | Cirque | Deepak |
Devraj | Elephanta | Fishbone | Foliage | Gadiva | Garden Art | Ginkgo | Haimati |
Hex | Indus | Jacks | Kali | Kerala | Krishnan | Links | Lost | Malini | Mandava |
Marquise | Monsoon | Nadu | Noktalar | Origami | Padmesh | Perdita | Pivot | Pixel |
Prose | Punto | Raja | Sakra | Sankaran | Sanskrit | Setro | Shard | Siptical | Stone
Age | Sutra | Telugu | Vanishing | Vedic | Wamika

Not suitable as a freestanding product.

Elevate your environment with style, texture, contrast, and depth, all while creating a harmonious ambiance with superior sound absorption.

Dimensions Pattern Only

1220mm (48") x 2745mm (108') x 12mm (1/2")

**Pattern on Backer** 

1220mm (48") x 2745mm (108') x 24mm (1")

Composition Zintra Acoustic Panel - 100% Solution Dyed (Colour Through) Polyester

12mm (1/2") - Density 2.4 kg/m<sup>2</sup> 0.5 lb/ft<sup>2</sup>

24mm (1") - Density 3.6 kg/m<sup>2</sup> 0.75 lb/ft<sup>2</sup>



**Acoustics** » Acoustic Panels

| Sustainability            | Zintra is made from 100% recyclable materials.   |
|---------------------------|--|
|                           | • 60% post-consumer recycled content from PET bottles.   |
|                           | • 35% pre-consumer recycled content from PET chips   |
|                           | • 5% polylactic acid (PLA)   |
| Fire Rating               | ASTM-E84 – Class A classification<br>AS ISO 9705 – 2003 – Group 1 classification<br>EN-13501 – B-s2-d0 classification  |
| Warranty                  | Visit FAQ for more details.  |
| Supplied As               | Ships Flat Pack  |
|                           | Go to the Technical Documents and download the Installation Guide for more details.  |
| Suggested<br>Installation | Go to Technical Documents and download the Installation Guide for more details.  |
| How to Specify            | <ol> <li>Select Pattern design</li> <li>Select Pattern only or Pattern on Backer.</li> <li>Select Zintra Colour.</li> </ol>  |
|                           | If selecting backer please state which colour is the pattern layer and which is the backer.  |
| Care Instructions         | Vacuum to remove dust.   |
|                           | Dab Zintra with a damp clean cloth and mild solution of liquid detergent and warm water. Repeat using only clean water, then pat dry with a lint free cloth.       |
|                           | For difficult stains, use a solution of household bleach (10% bleach / 90% water). To remove the bleach, repeat using a clean, water dampened cloth, then pat dry. |
|                           | Always test in an inconspicuous area first and if you don't see the expected results, contact us.  |
| Customisable              | The Zintra Acoustic Solutions range is customisable to your project. Please get in touch with your local contact for details.                                      |



**Acoustics** » Acoustic Panels

#### Additional Comments Patterns Only NRC Rating

- Directly Mounted: 0.45
- With 2" (50mm) Air Gap: 0.85
- With 6" (152mm) Air Gap: 0.90
- With 12" (305mm) Air Gap: 0.95

#### **Patterns on Backer NRC Rating**

- Directly Mounted: 0.75
- With 2" (50mm) Air Gap: 0.95
- With 6" (152mm) Air Gap: 1.0
- With 12" (305mm) Air Gap: 1.0


#### Colour & Finish Options

#### Zintra 12mm Solid PET





**Acoustics** » Acoustic Panels

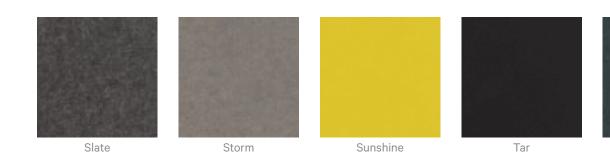

Twilight